


TENSILE RESISTANT COUPLING MODEL FIG16

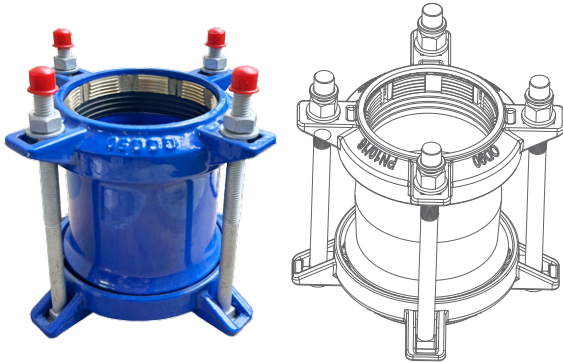

PRODUCTION STANDARDS

MODEL FIG16 | DN50 - DN300
PN10 - PN16

Design	ISO 2531
Connection	BS EN545
Temperature max	80°C
Deflection and pullout	BS EN 12842:2000

MATERIAL SELECTION

No	Name	Material
1	End Ring	Ductile iron with FBE coating
2	Bolt and nut	Carbon Steel with dacro
3	Sleeve	Ductile iron with FBE coating
4	Gasket	EPDM
5	Restrained Ring	Brass

DIMENSIONS

No	PIPE OD	PN	H	MxL	N
1	OD63	PN10/16	95	M12X190	2
2	OD75	PN10/16	95	M12X190	2
3	OD90	PN10/16	95	M12X190	4
4	OD110	PN10/16	95	M12X190	4
5	OD125	PN10/16	95	M12X190	4
6	OD160	PN10/16	102	M12X190	4
7	OD200	PN10/16	120	M14X230	4
8	OD225	PN10/16	120	M14X230	4
9	OD250	PN10/16	135	M14X260	6
10	OD315	PN10/16	135	M14X270	6

